



## EcoBatt® batts and rolls

### Unfaced, Kraft, FSK, Foil

EcoBatt glass mineral wool insulation takes sustainability to a new level while delivering Knauf's exceptional quality, handling and durability. EcoBatt leverages ECOSE® Technology—a revolutionary binder that transformed the glass wool insulation industry. It is based on rapidly renewable, bio-based material. EcoBatt also contains sand—an abundant resource—and recycled glass.



### Performance dashboard

#### Features & functionality

Faced products resist tears, are marked in one-foot increments, and feature extra wide stapling flange for faster and easier install

Highly resilient, recovers quickly to full thickness for snug fit and superior aesthetics

Consistent quality materials cut easily with low dust

Excellent acoustical properties reduce sound transmission

[Visit Knauf for more product information](#)

#### Environment & materials

##### Improved by:

Utilization of recycled glass

Knauf's original plant-based ECOSE binder technology

Optimized compression packaging

##### Certifications, rating systems & disclosures:

Declare, Red List Free and HPD v2.1

Energy Star

[UL GREENGUARD Gold certified](#)

[UL Validated recycled content](#)

[UL Validated formaldehyde-free](#)

[Audited, European Certification Board for Mineral Wool Products exoneration process](#)

ASTM C 665; Type 1, Class A (unfaced); ASTM C 665; Type II, Class C (kraft faced); ASTM C 665; Type III, Class A (FSK-25 foil faced); ASTM C 665; Type III, Class B (foil faced)



CSI MasterFormat® #MF 07 21 00

[Thermal Insulation Guide Specification](#)

For spec help, [contact us](#) or call 317 421 8727

[See LCA, interpretation & rating systems](#)

[See materials, interpretation & rating systems](#)



## SM Transparency Report™ + Material Health Overview™

#### VERIFICATION

LCA

3rd party reviewed



Transparency Report

3rd party verified



Material evaluation

Self-declared



Validity: 12/03/18 – 12/03/23  
KNA – 12032018 – 001

This declaration was independently verified by NSF to ISO 21930:2017, EN 15804, the UL Environment PCR, and ISO 14025:2006.

NSF International  
P.O. Box 130140  
789 N. Dixboro Road  
Ann Arbor, MI 48105, USA  
[www.nsf.org](http://www.nsf.org)  
734 769 8010



#### Knauf Insulation, Inc.

One Knauf Drive  
Shelbyville, IN 46176  
[www.knaufinsulation.us](http://www.knaufinsulation.us)  
317 398 4434

Contact us



# LCA & material health results & interpretation

EcoBatt® batts and rolls

Life cycle assessment

Material health

## Scope and summary

Cradle to gate  Cradle to gate with options  Cradle to grave

### Application

Thermal and acoustical barriers for energy-efficient construction in North America. They can be used in new and retrofit wood and metal frame applications in residential and commercial structures, as well as in manufactured housing. These applications include thermal and acoustical treatments to walls, ceilings and floors. Insulation is delivered to the installation site as one packaged bag containing varying amounts of product.

### Functional unit

**Reference service life: 75 years.** One square meter of installed insulation material, packaging included, with a thickness that gives an average thermal resistance of  $R_{Si}=1m^2 \cdot K/W$  over a period of 75 years.

**Reference flow:** 0.348 kg of product with an unfaced option, a 0.094 kg draft facing option, a 0.144 kg FSK facing option, or a 0.128 kg foil facing option, at a thickness of 0.0472 m to achieve the functional unit. (ASTM C518)

### Manufacturing data

**Reporting period: October 2015 – September 2016**

**Location: Shelbyville, IN and Shasta Lake, CA**


### Default installation, packaging, and disposal scenarios

At the installation site, insulation products are unpackaged and installed. Staples may be used to install batts and rolls. No material is lost or wasted because scraps are typically used to fill corners or crevices. Plastic packaging waste is disposed (15% to recycling, 68% to landfill, and 17% to incineration), and no maintenance or replacement is required to achieve the product's life span. After removal, the insulation is assumed to be landfilled.

### Material composition greater than 1% by weight

PART	MATERIAL	AVG % WT.
Batch	Post-consumer cullet	44.0%
Facing	Facing material	13.0%
Batch	Sand	13.0%
Facing	Facing adhesive	8.3%
Batch	Borax	6.8%
Binder	Sugars	4.1%
Batch	Soda ash	3.8%
Batch	Quicklime	2.8%
Batch	In-house cullet	1.8%
	Other	2.4%

### Total impacts by life cycle stages [mPts/func unit]

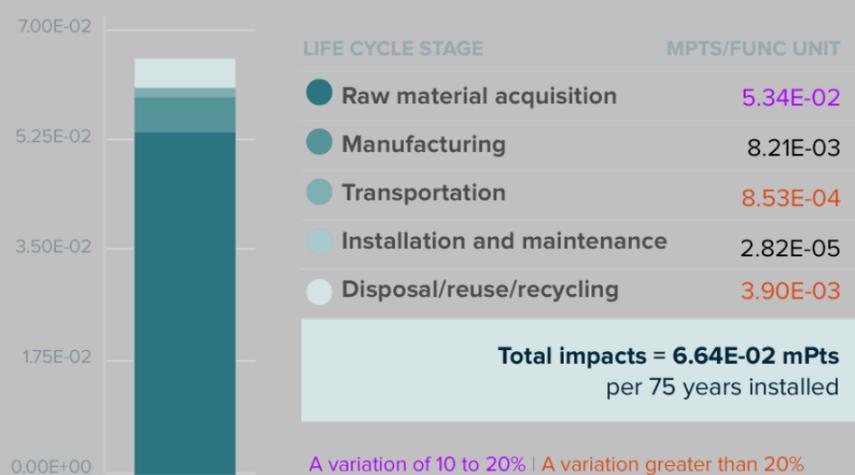

## What's causing the greatest impacts

### All life cycle stages

**For unfaced product, the manufacturing stage dominates the results for all impact categories except for respiratory effects, where the raw material acquisition stage dominates.** Following these two stages, the next highest impacts come from transportation and disposal, which have a similar contribution. The energy required to melt the glass and produce the glass fibers is the largest contributor to the manufacturing stage. The impact of the raw material acquisition stage is mostly due to the batch and binder materials. Since sand and borax are melted in the oven, they are not released into the air as fine particulates and therefore likely actually contribute less than what is calculated in the results tables below. The contributions to outbound transportation are caused by the use of trucks and rail transport. The landfilling of the discarded product contributes to the disposal stage. The only impacts associated with installation and maintenance are due to the disposal of packaging waste, which is the smallest contributor of all the stages.

For faced products, the raw material acquisition stage is higher compared to the unfaced products because it includes potential impacts from the facing. Potential impacts for transportation and disposal are also higher due to the added mass from the addition of facing.

### Manufacturing stage

**The energy required to melt the glass and produce the glass fibers is the largest contributor to the manufacturing stage for all impact categories.**

### Characterized vs. single score results

Due to normalization and weighting, different stages can dominate the characterized and single score results. The batch ingredients sand and borax contribute significantly to the respiratory effects category, causing the raw materials acquisition stage to dominate the mPt results, but not the characterized results. However, they are not released into the air as fine particulates and therefore likely actually contribute less than what is calculated in the raw material acquisition stage. What this means is that the manufacturing stage may have a larger share of the impact than what is displayed in the total impacts by life cycle stage.

### Sensitivity analysis

**The four different facing options impact the type and amount of raw materials extracted during the raw material acquisition stage.** When facing is added, the increased mass of the product causes a higher transportation impact. There is also an increased impact during disposal due to the different facing materials being landfilled.

### Multi-product weighted average

Results represent the weighted average using production volumes for the products covered. Variations of specific products for differences of 10–20% against the average are indicated in purple; differences greater than 20% are indicated in red. A difference greater than 10% is considered significant.

## How we're making it greener

**Knauf and Manson are committed to providing products that conserve energy and preserve natural resources.**

- These products use ECOSE® Technology, which is a plant-based binder adhesive instead of a fossil fuel based binder. ECOSE Technology represents a fossil fuel avoidance equivalent of 100,000 barrels of oil a year for Manson and Knauf Insulation products combined.
- Our product contains a high degree of recycled content, which translates to 20% less glass melting energy and a 25% reduction in embodied carbon.
- Our utilization of recycled content reduces mining impacts by 60%. In fact, Knauf and Manson products combined use 10 railcars of recycled glass a day.
- EcoBatt®'s glass is audited by a 3rd party to ensure biosoluble chemistry from a health and safety standpoint.

[See how we make it greener](#)

## LCA results

LIFE CYCLE STAGE	RAW MATERIAL ACQUISITION	MANUFACTURING	TRANSPORATION	INSTALLATION AND MAINTENANCE	DISPOSAL/REUSE/ RECYCLING
<b>Information modules: Included   Excluded*</b>  *In the installation and maintenance phase, packaging waste in module A5 is the only contributor to the potential impacts.	<b>A1 Raw Materials</b>	<b>A3 Manufacturing</b>	<b>A4 Transportation/ Delivery</b>	<b>A5 Construction/ Installation</b>	<b>C1 Deconstruction/ Demolition</b>
	<b>A2 Transportation</b>			<b>B1 Use</b>	<b>C2 Transportation</b>
				<b>B2 Maintenance</b>	<b>C3 Waste Processing</b>
				<b>B3 Repair</b>	<b>C4 Disposal</b>
				<b>B4 Replacement</b>	
				<b>B5 Refurbishment</b>	
				<b>B6 Operational energy use</b>	
				<b>B7 Operational water use</b>	
					

## SM 2013 [Learn about SM Single Score results](#)

Impacts per 75 years of service	5.34E-02 mPts	8.21E-03 mPts	8.53E-04 mPts	2.82E-05 mPts	3.90E-03 mPts
<b>Materials or processes contributing &gt;20% to total impacts in each life cycle stage</b>	Batch material and binder material production.	Energy required to melt the glass and produce the glass fibers.	Truck and rail transportation used to transport product to building site.	Transportation to disposal and disposing of packaging materials.	Transportation to landfill and landfilling of product.

## Unfaced: TRACI v2.1 results per functional unit

LIFE CYCLE STAGE	RAW MATERIAL ACQUISITION	MANUFACTURING	TRANSPORATION	INSTALLATION AND MAINTENANCE	DISPOSAL/REUSE/ RECYCLING
------------------	--------------------------	---------------	---------------	------------------------------	---------------------------

### Ecological damage

Impact category	Unit						
<b>Acidification</b>	kg SO <sub>2</sub> eq	?	7.66E-04	2.18E-03	1.11E-04	3.86E-06	6.40E-05
<b>Eutrophication</b>	kg N eq	?	8.36E-05	1.36E-04	6.92E-06	8.72E-07	9.06E-06
<b>Global warming</b>	kg CO <sub>2</sub> eq	?	1.52E-01	4.58E-01	8.12E-02	5.70E-04	1.62E-02
<b>Ozone depletion</b>	kg CFC-11 eq	?	1.64E-11	1.16E-10	2.80E-12	3.60E-11	1.88E-12

### Human health damage

Impact category	Unit						
<b>Carcinogenics</b>	CTU <sub>h</sub>	?	2.83E-12	6.91E-11	1.43E-13	1.53E-13	2.12E-13
<b>Non-carcinogenics</b>	CTU <sub>h</sub>	?	1.81E-13	1.72E-12	5.20E-14	1.67E-13	1.34E-14
<b>Respiratory effects</b>	kg PM <sub>2.5</sub> eq	?	7.94E-04	1.16E-04	6.76E-06	4.57E-07	5.09E-05
<b>Smog</b>	kg O <sub>3</sub> eq	?	8.93E-03	1.33E-02	1.91E-03	2.63E-05	1.00E-03

### Additional environmental information

Impact category	Unit						
<b>Ecotoxicity</b>	CTU <sub>e</sub>	?	2.57E-05	1.54E-04	4.32E-05	1.36E-07	5.65E-06
<b>Fossil fuel depletion</b>	MJ, LHV	?	1.48E-01	6.08E-01	1.64E-01	3.36E-04	3.21E-02

## Kraft-faced: TRACI v2.1 results per functional unit

LIFE CYCLE STAGE	RAW MATERIAL ACQUISITION	MANUFACTURING	TRANSPORATION	INSTALLATION AND MAINTENANCE	DISPOSAL/REUSE/ RECYCLING
------------------	--------------------------	---------------	---------------	------------------------------	---------------------------

### Ecological damage

Impact category	Unit						
<b>Acidification</b>	kg SO <sub>2</sub> eq	?	1.14E-03	2.18E-03	1.41E-04	3.86E-06	2.42E-04
<b>Eutrophication</b>	kg N eq	?	1.74E-04	1.36E-04	8.77E-06	8.72E-07	1.90E-05
<b>Global warming</b>	kg CO <sub>2</sub> eq	?	2.39E-01	4.58E-01	1.03E-01	5.70E-04	7.15E-02
<b>Ozone depletion</b>	kg CFC-11 eq	?	9.23E-11	1.16E-10	3.55E-12	3.60E-11	2.39E-12

### Human health damage

Impact category	Unit						
<b>Carcinogenics</b>	CTU <sub>h</sub>	?	6.25E-12	6.91E-11	1.81E-13	1.53E-13	6.08E-12
<b>Non-carcinogenics</b>	CTU <sub>h</sub>	?	3.77E-13	1.72E-12	6.59E-14	1.67E-13	3.47E-12
<b>Respiratory effects</b>	kg PM <sub>2.5</sub> eq	?	8.46E-04	1.16E-04	8.57E-06	4.57E-07	6.86E-05
<b>Smog</b>	kg O <sub>3</sub> eq	?	1.56E-02	1.33E-02	2.42E-03	2.63E-05	1.85E-03

### Additional environmental information

Impact category	Unit						
<b>Ecotoxicity</b>	CTU <sub>e</sub>	?	9.84E-05	1.54E-04	5.47E-05	1.36E-07	9.94E-06
<b>Fossil fuel depletion</b>	MJ, LHV	?	4.79E-01	6.08E-01	2.07E-01	3.36E-04	4.08E-02

## Foil-faced: TRACI v2.1 results per functional unit

LIFE CYCLE STAGE	RAW MATERIAL ACQUISITION	MANUFACTURING	TRANSPORTATION	INSTALLATION AND MAINTENANCE	DISPOSAL/REUSE/RECYCLING
------------------	--------------------------	---------------	----------------	------------------------------	--------------------------

### Ecological damage

Impact category	Unit						
Acidification	kg SO <sub>2</sub> eq	?	9.07E-04	2.18E-03	1.51E-04	3.86E-06	8.71E-05
Eutrophication	kg N eq	?	1.91E-04	1.36E-04	9.43E-06	8.72E-07	1.23E-05
Global warming	kg CO <sub>2</sub> eq	?	4.90E-01	4.58E-01	1.11E-01	5.70E-04	2.21E-02
Ozone depletion	kg CFC-11 eq	?	2.71E-09	1.16E-10	3.82E-12	3.60E-11	2.56E-12

### Human health damage

Impact category	Unit						
Carcinogenics	CTU <sub>h</sub>	?	2.78E-10	6.91E-11	1.94E-13	1.53E-13	2.89E-13
Non-carcinogenics	CTU <sub>h</sub>	?	2.38E-08	1.72E-12	7.09E-14	1.67E-13	1.82E-14
Respiratory effects	kg PM <sub>2.5</sub> eq	?	9.46E-04	1.16E-04	9.21E-06	4.57E-07	6.93E-05
Smog	kg O <sub>3</sub> eq	?	2.70E-02	1.33E-02	2.60E-03	2.63E-05	1.36E-03

### Additional environmental information

Impact category	Unit						
Ecotoxicity	CTU <sub>e</sub>	?	2.56E-02	1.54E-04	5.88E-05	1.36E-07	7.70E-06
Fossil fuel depletion	MJ, LHV	?	1.12E+00	6.08E-01	2.23E-01	3.36E-04	4.38E-02

## FSK-faced: TRACI v2.1 results per functional unit

LIFE CYCLE STAGE	RAW MATERIAL ACQUISITION	MANUFACTURING	TRANSPORTATION	INSTALLATION AND MAINTENANCE	DISPOSAL/REUSE/RECYCLING
------------------	--------------------------	---------------	----------------	------------------------------	--------------------------

### Ecological damage

Impact category	Unit						
Acidification	kg SO <sub>2</sub> eq	?	2.21E-03	2.18E-03	1.57E-04	3.86E-06	9.01E-05
Eutrophication	kg N eq	?	2.07E-04	1.36E-04	9.75E-06	8.72E-07	1.28E-05
Global warming	kg CO <sub>2</sub> eq	?	5.31E-01	4.58E-01	1.14E-01	5.70E-04	2.28E-02
Ozone depletion	kg CFC-11 eq	?	3.15E-09	1.16E-10	3.95E-12	3.60E-11	2.65E-12

### Human health damage

### Additional environmental information

See the additional EPD content required by the UL Environment PCR on page 4 of the [Transparency Report PDF](#).

## References

### LCA Background Report

Knauf Insulation and Manson Insulation Products LCA Background Report (public version), Knauf 2018. GaBi 7, GaBi 2017 database.

### PCRs

ISO 21930:2017 serves as the core PCR along with EN 15804 and UL Part A.

### ULE PCR Part A: Life Cycle Assessment Calculation Rules and Report Requirements v3.1

May 2, 2018. Technical Advisory Panel members reviewed and provided feedback on content written by UL Environment and USGBC. Past and present members of the Technical Advisory Panel are listed in the PCR.

### ULE PCR Part B: Building Envelope Thermal Insulation

Version 2.0, April 2018. PCR review conducted by Thomas Gloria, PhD (chair, t.gloria@industrial-ecology.com); Andre Desjarlais; and Christoph Koffler, PhD.

### ULE General Program Instructions v2.1, April 2017

**ISO 14025, “Sustainability in buildings and civil engineering works -- Core rules for environmental product declarations of construction products and services”, ISO21930:2017**

[Download PDF](#) SM Transparency Report/Material Health Overview, which includes the additional EPD content required by the UL Environment PCR.

SM Transparency Reports (TR) are ISO 14025 Type III environmental declarations (EPD) that enable purchasers and users to compare the potential environmental performance of products on a life cycle basis. They are designed to present information transparently to make the limitations of comparability more understandable. TRs/EPDs of products that conform to the same PCR and include the same life cycle stages, but are made by different manufacturers, may not sufficiently align to support direct comparisons. They therefore, cannot be used as comparative assertions unless the conditions defined in ISO 14025 Section 6.7.2. ‘Requirements for Comparability’ are satisfied. Comparison of the environmental performance of building envelope thermal insulation using EPD information shall be based on the product’s use and impacts at the building level, and therefore EPDs may not be used for comparability purposes when not considering the building energy use phase as instructed under the PCR. Full conformance with the PCR for building envelope thermal insulation allows EPD comparability only when all stages of a life cycle have been considered, when they comply with all referenced standards, use the same sub-category PCR, and use equivalent scenarios with respect to construction works. However, variations and deviations are possible. Example of variations: Different LCA software and background LCI data sets may lead to different results upstream or downstream of the life cycle stages declared.

## Rating systems

The intent is to reward project teams for selecting products from manufacturers who have verified improved life-cycle environmental performance.

### LEED BD+C: New Construction | v4 - LEED v4

Building product disclosure and optimization

#### Environmental product declarations

<input type="radio"/> Industry-wide (generic) EPD	½ product
<input checked="" type="radio"/> Product-specific Type III EPD	1 product

### Green Globes for New Construction and Sustainable Interiors

#### Materials and resources

- NC 3.5.1.2 Path B: Prescriptive Path for Building Core and Shell
- C 3.5.2.2 and SI 4.1.2 Path B: Prescriptive Path for Interior Fit-outs

### Collaborative for High Performance Schools National Criteria

#### MW 7.1 – Environmental Product Declarations

<input checked="" type="checkbox"/> Third-party certified type III EPD	2 points
--	----------

## SM Transparency Report™ + Material Health Overview™

### VERIFICATION

LCA

3rd party reviewed



Transparency Report

3rd party verified



Material evaluation

Self-declared



Validity: 12/03/18 – 12/03/23  
KNA – 12032018 – 001

This declaration was independently verified by NSF to ISO 21930:2017, EN 15804, the UL Environment PCR, and ISO 14025:2006.

**NSF International**  
P.O Box 130140  
789 N.Dixboro Road  
Ann Arbor, MI 48105, USA  
www.nsf.org  
734 769 8010



### Knauf Insulation, Inc.

One Knauf Drive  
Shelbyville, IN 46176  
www.knaufinsulation.us  
317 398 4434

Contact us



# LCA & material health results & interpretation

EcoBatt® batts and rolls

Life cycle assessment

**Material health**

## Evaluation programs

### Declare

**Declare** labels are issued to products disclosing ingredient inventory, sourcing and end of life options. Declare labels are based on the Manufacturers Guide to Declare, administered by the International Living Future Institute.

### How it works

Material ingredients are inventoried and screened against the **Living Building Challenge** (LBC) Red List which represents the 'worst in class' materials, chemicals, and elements known to pose serious risks to human health and the greater ecosystem.

### The Health Product Declaration®

The HPD Open Standard provides a consistent, and transparent format to accurately disclose the material contents and associated hazard classifications for a building product.

### How it works

Material ingredients are screened and categorized according to the hazards that international governmental bodies and toxicology experts have associated with them, based on two listings:

- Authoritative lists maintained or recognized by government bodies
- Screening lists, which include chemicals that government bodies determined need further scrutiny, as well as chemical lists not recognized by any government body.

## Assessment scope and results

### Declare™

Inventory threshold: 100 ppm

#### Declare level:

The Declare product database and label are used to select products that meet the LBC's stringent materials requirements, streamlining the materials specification and certification process.

- LBC Red List Free ?
- LBC Compliant ?
- Declared ?



Click the label to see the full declaration.

- **EcoBatt® Kraft Faced**
- **EcoBatt® Unfaced**
- **EcoBatt® Foil**



## Health Product Declaration®

### EcoBatt® Foil-Scrim-Kraft (FSK) Faced


Inventory threshold: 100 ppm

Full disclosure known hazards: Yes

Based on the selected content inventory threshold:

- Characterized  Screened  Identified

#### TOTAL INTENTIONAL INGREDIENTS



#### GreenScreen® List Translator Scores

- List Translator Likely Benchmark 1 / Benchmark 1 ?
- List Translator Possible Benchmark 1 ?
- List Translator Benchmark Unknown ?
- Benchmark 3 ?
- Benchmark 3 ?
- Benchmark 4 ?
- No GS data available ?

[Learn about the GreenScreen® List Translator](#)

#### Total VOC Content ?

VOC Content data is not applicable for this product category.

## References

### Declare

- EcoBatt® Kraft Faced
- EcoBatt® Unfaced
- EcoBatt® Foil

### Manufacturer's Guide to Declare

A comprehensive guide providing information about the program, the assessment methodology, how to submit material data to obtain a Declare label and how they are used to meet the Health & Happiness and Materials Petals of the Living Building Challenge.

### Health Product Declaration®

EcoBatt® Foil-Scrim-Kraft (FSK) Faced

### Health Product Declaration Open Standard v2.1

The standard provides guidance to accurately disclose the material contents of a building product using a standard, consistent, and transparent format.

## What's in this product and why

### Declare level

**Unfaced and kraft faced EcoBatt® have no Red List chemicals.** The Red List is a list of chemicals that are not allowed in Living Building Challenge buildings. Being Red List free is our design benchmark at Knauf.

EcoBatt utilizes a bio-based binder chemistry derived from corn that is formaldehyde-free and more interior friendly than phenol-formaldehyde (P/F) systems. This product transformed the industry, moving away from P/F systems and toward bio-based binder adhesive systems for wall and ceiling batt products.

### What's in the product and why

**The ingredients of most EcoBatt® variants avoid the 800+ chemicals of the Living Building Challenge Red List.** This is primarily because of its bio-based binder adhesive chemistry known as ECOSE® Technology. ECOSE is based on dextrose or high fructose corn syrup instead of phenol and formaldehyde. Dextrose and fructose can be used interchangeably. The ECOSE binder allows the product to be validated by the UL Environment as formaldehyde-free. Formaldehyde is a Red List chemical.

EcoBatt with foil scrim kraft (FSK) facer does not meet Red List free status because the facer contains a halogenated fire retardant (HFR). This is why we disclose the ingredients in an HPD rather than Declare used for all other product variants.

Red List free is our development benchmark and we constantly challenge ourselves on elimination of Red List chemicals. An HFR is used on the FSK variant because the product is for exposed applications and must meet stringent fire performance requirements. We are very aware of the concerns associated with HFRs and continually work with vendors on this issue. At the same time, fire performance is critical and current events relating to fire performance of building materials only support the importance of fire-safe products.

### What's been done in the design and manufacture in consideration of the potential human health impacts in the use stage

**The primary ingredient in this product is recycled glass.** While recycled content may vary from year to year, the recycled content is currently greater than 60% by weight. The second largest content is silica sand which is sourced as locally as possible. The third largest ingredient is corn-based syrup (dextrose or fructose). As a result of using plant-based binders, the VOC profile of this product is very interior friendly.

The emission from our factories is also much better for our communities. We ensure our glass formulations have no serious health concerns by allowing our processes to be audited to meet European Certification Board for Mineral Wool Products (EUCEB) biosolubility requirements.

### Where it goes at the end of its life

**At this time, the product is landfilled at end of life.** We take extended producer responsibility very seriously and have active programs to address end of life. There is no option other than landfills at this time.

## How we're making it healthier

**Knauf engages very closely with its vendors to eliminate and avoid chemicals of concern.** No competitor has as many Red List free products as Knauf Insulation. We continually reduce our environmental impacts through recycled content and optimize our products by designing them to be transformative.

[See how we make it greener](#)

## Rating systems

### LEED BD+C: New Construction | v4 - LEED v4

Building product disclosure and optimization

#### Material Ingredients

Credit value options 1 product each

1. Reporting  2. Optimization  3. Supply Chain Optimization

### Living Building Challenge 3.0

#### Materials petals imperatives

10. Red List Free  12. Responsible Industry  13. Living Economy Sourcing

### Well Building Standard®

#### Air and Mind Features

- Air, 26. Enhanced Material Safety  
 Mind, 97. Material Transparency  Mind, 98. Organizational Transparency

### Collaborative for High Performance Schools National Criteria

#### MW 10.1 — Building Product Health Related Information Reporting

- Product Health Related Information Report 1 point

## SM Transparency Report™ + Material Health Overview™

### VERIFICATION

Material evaluation

Self-declared

KNA – 12032018 – 001

The material health evaluation is self-declared and done in accordance with the HPD Open Standard 2.1

HPD Collaborative  
401 Edgewater Place, Suite 600  
Wakefield, MA 01880  
www.hpdcollaborative.org  
781.876.8871

The material health evaluation is self-declared and done in accordance with the Manufacturers Guide to Declare.

International Living Future Institute  
501 East Madison St.  
Seattle, WA 98122  
www.living-future.org  
206 223 2028

### Knauf Insulation, Inc.

One Knauf Drive  
Shelbyville, IN 46176  
www.knaufinsulation.us  
317 398 4434

Contact us



# How we make it greener

## EcoBatt® batts and rolls

Collapse all

See LCA results by life cycle stage

### RAW MATERIAL ACQUISITION



#### Utilize recycled content

Our plants use 60 – 80% recycled content – which translates to about 10 railcars of recycled glass cullet a day. By leveraging so much recycled content, we reduce the energy required to form glass fibers by 20%. If we use even 60% recycled content, then mining impacts are reduced proportionately.

#### Pursue sequestration potential

Manson and Knauf's bio-based ECOSE Technology is derived from corn. On average, the Knauf Family Farm produces one half the amount of corn we use to make our products on an annual basis, which is equal to 5,000 acres. While we don't grow the corn used in our products, the use of corn has a significant carbon sequestration impact on our processes. For instance, the use of corn actually offsets the carbon impact of some of the ancillary facers used on our products.

### MANUFACTURING


#### Develop bio-based formaldehyde-free binder

In 2008, Manson and Knauf Insulation launched perhaps the nation's largest formaldehyde-free green chemistry initiative called ECOSE Technology. Offering this into the building materials marketplace quickly transformed the entire glass mineral fiber industry toward bio-based chemistries. Today phenol-formaldehyde (PF) based resins are largely a thing of the past with regard to large volume mineral fiber based insulation products. Manson and Knauf have also launched a new business venture to assist other industries in accessing ECOSE Technology for their processes.

In a given year, using corn-based ECOSE Technology instead of phenol & formaldehyde avoids the equivalent of more than 100,000 barrels of oil in North America alone.

#### Lead green chemistry efforts



Following the launch of our ECOSE Technology in 2009, we had transformed all of our products and processes to this new technology. Using our bio-based ECOSE Technology has removed phenol and formaldehyde from our stack emissions. By 2012, the entire industry had followed our lead. This initiative not only established Manson and Knauf Insulation in a leadership position, but it had a transformative impact on our industry in general.

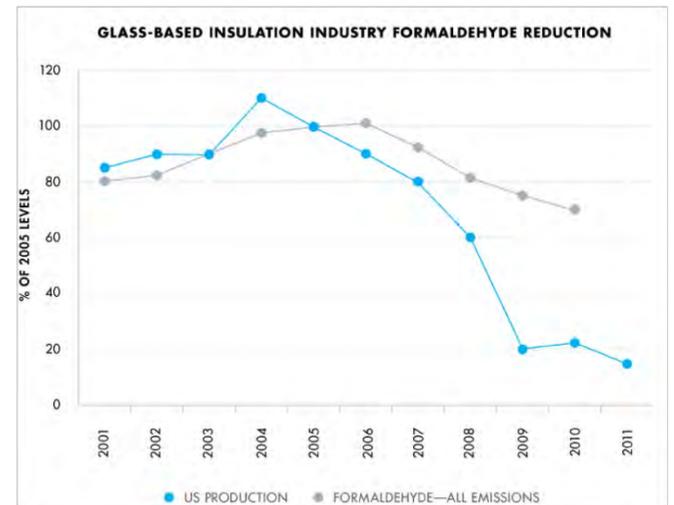

#### Green manufacturing Processes

**1. Regenerative thermal oxidizers** Manson and Knauf Insulation use regenerative thermal oxidizers (RTO) to capture and recycle much of the energy we used to cure our products. RTO is equipment used for the treatment of exhaust air. Our ovens exhaust into a ceramic heat exchange media to capture and reuse the heat in the exhausted air. Therefore, the amount of energy required to cure our product is reduced substantially.

**2. Recycling** As you can see below, everything we do starts with recycling. Our plant uses as much as 80% recycled content. While our only option is to landfill our products at end of life, that doesn't stop us from encouraging consumers to recycle other products, particularly glass bottles.

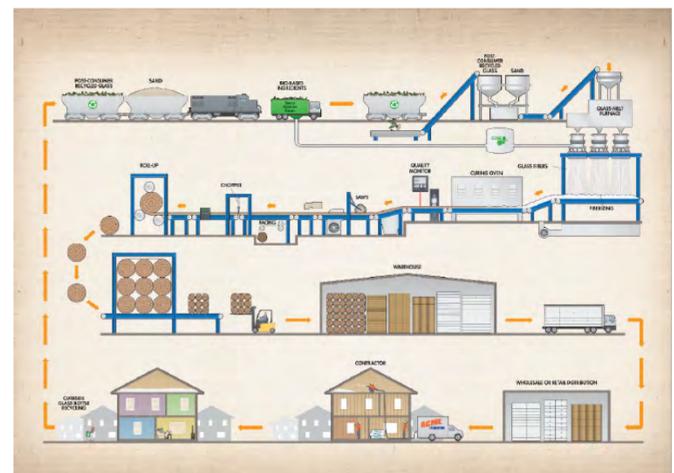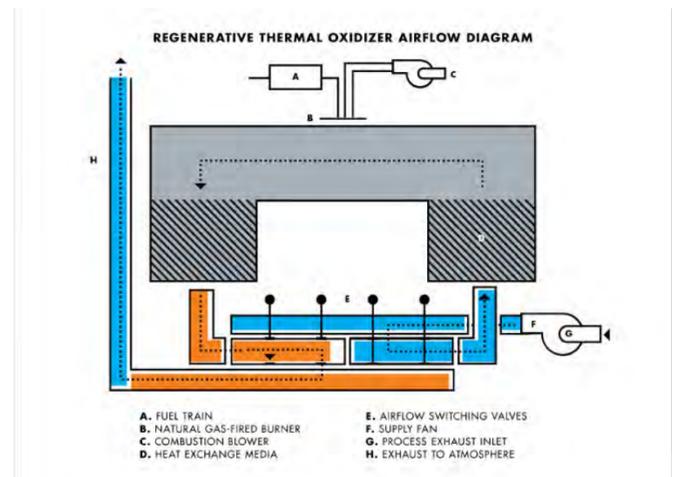

#### Continuous Improvement

Continuous improvement is key to our sustainable development. Globally, we maintain the following Bureau Veritas certifications: ISO 9000, 14000, and 50001. These certifications relate to quality management systems, energy management and environmental management efforts. For more information on our current continuous improvement efforts, please review our global sustainability report.

## TRANSPORTATION



### Leverage compression packaging

Glass is a high modulus material, which helps to facilitate compression packaging. We compress our insulation to fit up to five times more product on every truck. This compression means:

- More material can fit on one truck when compared to other insulation materials
- Fewer packages on a job
- Fewer deliveries needed



## INSTALLATION AND MAINTENANCE



### Be confident in glass mineral wool's safety

In the past, a label regarding the carcinogenic potential of insulation made from glass fibers was required on all packaging. Following forty years of research, glass mineral wool has been exonerated entirely. Glass mineral wool is comprised of fibers that are biosoluble, meaning that the fibers dissolve in the body in a short period of time and exit the body with normal bodily functions. The scrutiny glass mineral wool has undergone is now seen as proof of its safety.

### Meet and exceed green standards

**GREENGUARD certified** On the forefront of indoor air quality, Knauf Insulation was the first GREENGUARD certified product in 2002. This achievement led us to understand the impact our formaldehyde-free products could have on the indoor environment. The formaldehyde-free claim is third party validated by UL Environment.

**Red List Free** Since 2012, Knauf Insulation North America used the Living Building Challenge (LBC) Red List as its developmental benchmark. The Red List is a list of chemicals that are avoided in material imperative for the construction of LBC buildings. Formaldehyde is just one of about 800 chemicals on the Red List. Manson Insulation has chosen the Health Product Declaration® (HPD) Collaborative as its standard for reporting building product content and associated health information.

**EUCEB tested** Glass fiber is perhaps the most widely studied building material available today. All of our processes and formulations are voluntarily third-party audited for compliance with the health and safety exoneration criteria for glass and rock based fiber through the European Certification Board for Mineral Wool Products (EUCEB) exoneration process. This guarantees the formulations are biosoluble and pose no health concerns. Having 35 years of research behind its safety, perhaps no other building material has been as thoroughly evaluated as fiberglass products. We believe a safe product is one that has been thoroughly evaluated.

### Green building rating systems

Our products offer a vast array of potential credits for major green building rating systems, including: WELL, LEED v4, International Green Construction Code, Green Guide for Health Care, NAHB Green Building Standard and more.

Visit the [green building rating systems page](#) to see all the credits you can earn using Manson and Knauf Insulation products.

### Green building rating system credits

Find out all the credits you can earn with Knauf products.

[Learn more](#)

## DISPOSAL



### Promote Recycling

Manson and Knauf are recycling advocates. We take every opportunity to advocate for recycling and financially support the Glass Recycling Coalition (GRC). We feel that a comprehensive understanding of the benefits of recycling will lead to greater recycling adoption and more promotion by state and local governments. While our only option is to landfill our products at end of life, that doesn't stop us from encouraging consumers to recycle other products, particularly glass bottles.



## SM Transparency Report™ + Material Health Overview™

### VERIFICATION

LCA

3rd party reviewed



Transparency Report

3rd party verified



Material evaluation

Self-declared



Validity: 12/03/18 – 12/03/23  
KNA – 12032018 – 001

This declaration was independently verified by NSF to ISO 21930:2017, EN 15804, the UL Environment PCR, and ISO 14025:2006.

**NSF International**  
P.O Box 130140  
789 N.Dixboro Road  
Ann Arbor, MI 48105, USA  
[www.nsf.org](http://www.nsf.org)  
734 769 8010



**Knauf Insulation, Inc.**  
One Knauf Drive  
Shelbyville, IN 46176  
[www.knaufinsulation.us](http://www.knaufinsulation.us)  
317 398 4434

[Contact us](#)



**Additional EPD content required by:  
ULE PCR Parts A and B for Building Envelope Thermal Insulation**

EcoBatt®

**Data**

**Background** This company-specific product/product group specific declaration was created by collecting product data over the course of a year for each line at each location the product was manufactured. For products with multiple manufacturing locations, data are a weighted average by production volume at each location. For average products, which are products that have more than one facing option, data are a weighted average of the mass of each functional unit. The reference service life applies for the reference in-use conditions only.

**Allocation** Since only facility-level data were available, allocation among a facility's co-products was used to determine the input and output flows associated with each product. Allocation of materials and energy was done on a mass basis for all products except for the facing, which was allocated based on product area. Allocation of transportation was based on either weight or volume, depending on which was found to greater restrict the amount of cargo. Glass cullet is assumed to enter the system burden-free in that burden associated with the production of virgin glass is not allocated to the fiberglass life cycle. Likewise, the system boundary was drawn to include landfilling of fiberglass at end-of-life (following the polluter pays principle), but exclude any credits from recovery.

**Cut-off criteria** For the inclusion of mass and energy flows are 1% of renewable primary resource (energy), 1% nonrenewable primary resource (energy) usage, 1% of the total mass input of that unit process, and 1% of environmental impacts. The total of neglected input flows per module does not exceed 5% of energy usage, mass, and environmental impacts. The only exception to these criteria is substances with hazardous and toxic properties, which must be listed even when the given process unit is under the cut-off criterion of 1% of the total mass. No known flows are deliberately excluded from this declaration.

**Scenarios and additional technical information**

PARAMETER	VALUE	UNIT
-----------	-------	------

**Transport to the building site [A4]**

Vehicle type	Truck and rail	
Average distance from Shelbyville to installation site	680	mi
Average distance from Shasta Lake to installation site	884	mi
Average rail distance to installation site	2,200	mi
Capacity utilization by mass	27	%

**Installation into the building [A5]**

Distance from installation site to disposal	100	mi
Mass of plastic packaging waste to disposal	0.0046-0.0047	kg
Biogenic carbon contained in plastic packaging	0	kg CO <sub>2</sub>
GWP based in biogenic carbon content of plastic packaging	0	kg CO <sub>2</sub> e

**Disposal/reuse/recycling [C1-C4]**

Distance from installation site to disposal	100	mi
Mass of product waste to disposal	0.348-0.492	kg
Removals of biogenic carbon (excluding packaging)	7.32E-04-9.36E-02	kg CO <sub>2</sub>

**Resource use, output and waste flows, and carbon emissions and removals for foil-faced EcoBatt® Insulation per functional unit**

Parameter	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	Total
-----------	------	-------	----	----	----	----	----	----	----	----	----	----	----	----	----	-------

**Resource use indicators**

Renewable primary energy used as energy carrier (fuel)	MJ, LHV	3.22E+00	1.09E-02	9.16E-05	0	0	0	0	0	0	0	0	1.49E-03	0	1.37E-02	3.24E+00
Renewable primary resources with energy content used as material	MJ, LHV	2.65E-03	0	3.19E-09	0	0	0	0	0	0	0	0	0	0	0	2.65E-03
Total use of renewable primary resources with energy content	MJ, LHV	3.22E+00	1.09E-02	9.16E-05	0	0	0	0	0	0	0	0	1.49E-03	0	1.37E-02	3.25E+00
Non-renewable primary resources used as an energy carrier (fuel)	MJ, LHV	1.66E+01	1.63E+00	2.75E-03	0	0	0	0	0	0	0	0	8.03E-02	0	2.67E-01	1.86E+01
Non-renewable primary resources with energy content used as material	MJ, LHV	1.04E-08	0	0	0	0	0	0	0	0	0	0	0	0	0	1.04E-08
Total use of non-renewable primary resources with energy content	MJ, LHV	1.66E+01	1.63E+00	2.75E-03	0	0	0	0	0	0	0	0	8.03E-02	0	2.67E-01	1.86E+01
Secondary materials	kg	2.24E-01	0	0	0	0	0	0	0	0	0	0	0	0	0	2.24E-01
Renewable secondary fuels	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Non-renewable secondary fuels	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Recovered energy	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Use of net fresh water resources	m3	2.07E+03	4.11E+00	7.00E-02	0	0	0	0	0	0	0	0	2.77E-01	0	1.00E+01	2.09E+03

## Output flows and waste category indicators

Hazardous waste disposed	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Non-hazardous waste disposed	kg	0	0	4.60E-03	0	0	0	0	0	0	0	0	0	0	4.39E-01	4.43E-01
High-level radioactive waste, conditioned, to final repository	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Intermediate- and low-level radioactive waste, conditioned, to final repository	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Components for re-use	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Materials for recycling	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Exported energy	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

## Carbon emissions and removals

Biogenic Carbon Removal from Product	kg CO <sub>2</sub>	1.06E-02	0	0	0	0	0	0	0	0	0	0	0	0	0	1.06E-02
Biogenic Carbon Emission from Product	kg CO <sub>2</sub>	4.33E-02	0	0	0	0	0	0	0	0	0	0	0	0	9.96E-04	4.43E-02
Biogenic Carbon Removal from Packaging	kg CO <sub>2</sub>	1.27E-04	0	0	0	0	0	0	0	0	0	0	0	0	0	1.27E-04
Biogenic Carbon Emission from Packaging	kg CO <sub>2</sub>	0	0	1.13E-05	0	0	0	0	0	0	0	0	0	0	0	1.13E-05
Biogenic Carbon Emission from Combustion of Waste from Renewable Sources Used in Production Processes	kg CO <sub>2</sub>	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Calcination Carbon Emissions	kg CO <sub>2</sub>	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Carbonation Carbon Removals	kg CO <sub>2</sub>	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Carbon Emissions from Combustion of Waste from Non-Renewable Sources used in Production Processes	kg CO <sub>2</sub>	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

## TRACI v2.1 disaggregated results for foil-faced EcoBatt® Insulation per functional unit

LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks. These six impact categories required by the PCR are globally deemed mature enough to be included in Type III environmental declarations. Other categories are being developed and defined and LCA should continue making advances in their development; however, the EPD users shall not use additional measures for comparative purposes. Impact categories which were not required by the PCR are included in part to allow for the calculation of millipoints using the SM2013 Methodology, but it should be noted that there are known limitations related to these impact categories due to their high degree of uncertainty. LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
Acidification	kg SO <sub>2</sub> eq	3.08E-03	1.51E-04	3.86E-06	0	0	0	0	0	0	0	0	2.21E-05	0	6.50E-05
Eutrophication	kg N eq	3.27E-04	9.43E-06	8.72E-07	0	0	0	0	0	0	0	0	4.44E-06	0	7.90E-06
Global warming	kg SO <sub>2</sub> eq	9.48E-01	1.11E-01	5.70E-04	0	0	0	0	0	0	0	0	5.92E-03	0	1.62E-02
Ozone depletion	kg CFC-11 eq	2.83E-09	3.82E-12	3.60E-11	0	0	0	0	0	0	0	0	3.57E-13	0	2.21E-12
Smog	kg O <sub>3</sub> eq	4.03E-02	2.60E-03	2.63E-05	0	0	0	0	0	0	0	0	4.96E-04	0	8.67E-04
Fossil fuel depletion	MJ, LHV	1.72E+00	2.23E-01	3.36E-04	0	0	0	0	0	0	0	0	1.13E-02	0	3.25E-02

## Additional environmental information for foil-faced EcoBatt® Insulation per functional unit

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
Ecotoxicity	CTUe	2.57E-02	5.88E-05	1.36E-07	0	0	0	0	0	0	0	0	2.63E-06	0	5.07E-06
Carcinogenics	CTUh	3.47E-10	1.94E-13	1.53E-13	0	0	0	0	0	0	0	0	1.23E-14	0	2.76E-13
Non-carcinogenics	CTUh	2.38E-08	7.09E-14	1.67E-13	0	0	0	0	0	0	0	0	5.14E-16	0	1.77E-14
Respiratory effects	kg PM2.5 eq	1.06E-03	9.21E-06	4.57E-07	0	0	0	0	0	0	0	0	1.70E-06	0	6.76E-05

The product does not contain substances that are identified as hazardous according to standards or regulations of the Resource Conservation and Recovery Act (RCRA), Subtitle C, nor does it (or its associated processes) release dangerous, regulated substances that affect health and environment, including indoor air emissions, gamma or ionizing radiation emissions, or chemicals released to the air or leached to water and soil.





## Carbon emissions and removals

Biogenic Carbon Removal from Product	kg CO <sub>2</sub>	1.20E-02	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1.20E-02
Biogenic Carbon Emission from Product	kg CO <sub>2</sub>	4.33E-02	0	0	0	0	0	0	0	0	0	0	0	0	0	1.03E-03	4.43E-02
Biogenic Carbon Removal from Packaging	kg CO <sub>2</sub>	1.27E-04	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1.27E-04
Biogenic Carbon Emission from Packaging	kg CO <sub>2</sub>	0	0	1.13E-05	0	0	0	0	0	0	0	0	0	0	0	0	1.13E-05
Biogenic Carbon Emission from Combustion of Waste from Renewable Sources Used in Production Processes	kg CO <sub>2</sub>	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Calcination Carbon Emissions	kg CO <sub>2</sub>	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Carbonation Carbon Removals	kg CO <sub>2</sub>	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Carbon Emissions from Combustion of Waste from Non-Renewable Sources used in Production Processes	kg CO <sub>2</sub>	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

## TRACI v2.1 disaggregated results for FSK-faced EcoBatt® Insulation per functional unit

LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks. These six impact categories required by the PCR are globally deemed mature enough to be included in Type III environmental declarations. Other categories are being developed and defined and LCA should continue making advances in their development; however, the EPD users shall not use additional measures for comparative purposes. Impact categories which were not required by the PCR are included in part to allow for the calculation of millipoints using the SM2013 Methodology, but it should be noted that there are known limitations related to these impact categories due to their high degree of uncertainty. LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
Acidification	kg SO <sub>2</sub> eq	4.39E-03	1.57E-04	3.86E-06	0	0	0	0	0	0	0	0	2.29E-05	0	6.72E-05
Eutrophication	kg N eq	3.43E-04	9.75E-06	8.72E-07	0	0	0	0	0	0	0	0	4.59E-06	0	8.17E-06
Global warming	kg SO <sub>2</sub> eq	9.89E-01	1.14E-01	5.70E-04	0	0	0	0	0	0	0	0	6.12E-03	0	1.67E-02
Ozone depletion	kg CFC-11 eq	3.27E-09	3.95E-12	3.60E-11	0	0	0	0	0	0	0	0	3.69E-13	0	2.28E-12
Smog	kg O <sub>3</sub> eq	4.30E-02	2.69E-03	2.63E-05	0	0	0	0	0	0	0	0	5.13E-04	0	8.97E-04
Fossil fuel depletion	MJ, LHV	1.79E+00	2.31E-01	3.36E-04	0	0	0	0	0	0	0	0	1.16E-02	0	3.36E-02

## Additional environmental information for FSK-faced EcoBatt® Insulation per functional unit

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
Ecotoxicity	CTUe	2.76E-02	6.08E-05	1.36E-07	0	0	0	0	0	0	0	0	2.72E-06	0	5.24E-06
Carcinogenics	CTUh	4.87E-10	2.01E-13	1.53E-13	0	0	0	0	0	0	0	0	1.27E-14	0	2.86E-13
Non-carcinogenics	CTUh	3.99E-08	7.33E-14	1.67E-13	0	0	0	0	0	0	0	0	5.32E-16	0	1.83E-14
Respiratory effects	kg PM2.5 eq	1.13E-03	9.53E-06	4.57E-07	0	0	0	0	0	0	0	0	1.75E-06	0	7.00E-05

The product does not contain substances that are identified as hazardous according to standards or regulations of the Resource Conservation and Recovery Act (RCRA), Subtitle C, nor does it (or its associated processes) release dangerous, regulated substances that affect health and environment, including indoor air emissions, gamma or ionizing radiation emissions, or chemicals released to the air or leached to water and soil.

## Resource use, output and waste flows, and carbon emissions and removals for kraft-faced EcoBatt® Insulation per functional unit

Parameter	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	Total
<b>Resource use indicators</b>																
Renewable primary energy used as energy carrier (fuel)	MJ, LHV	3.14E+00	1.02E-02	9.16E-05	0	0	0	0	0	0	0	0	1.39E-03	0	1.28E-02	<b>3.17E+00</b>
Renewable primary resources with energy content used as material	MJ, LHV	2.63E-03	0	3.19E-09	0	0	0	0	0	0	0	0	0	0	0	<b>2.63E-03</b>
Total use of renewable primary resources with energy content	MJ, LHV	3.15E+00	1.02E-02	9.16E-05	0	0	0	0	0	0	0	0	1.39E-03	0	1.28E-02	<b>3.17E+00</b>
Non-renewable primary resources used as an energy carrier (fuel)	MJ, LHV	1.15E+01	1.51E+00	2.75E-03	0	0	0	0	0	0	0	0	7.49E-02	0	2.49E-01	<b>1.33E+01</b>
Non-renewable primary resources with energy content used as material	MJ, LHV	1.02E-08	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>1.02E-08</b>
Total use of non-renewable primary resources with energy content	MJ, LHV	1.15E+01	1.51E+00	2.75E-03	0	0	0	0	0	0	0	0	7.49E-02	0	2.49E-01	<b>1.33E+01</b>
Secondary materials	kg	2.24E-01	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>2.24E-01</b>
Renewable secondary fuels	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>0</b>
Non-renewable secondary fuels	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>0</b>
Recovered energy	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>0</b>
Use of net fresh water resources	m3	6.13E+02	3.82E+00	7.00E-02	0	0	0	0	0	0	0	0	2.59E-01	0	9.35E+00	<b>3.82E+00</b>

## Output flows and waste category indicators

Hazardous waste disposed	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>0</b>
Non-hazardous waste disposed	kg	0	0	4.60E-03	0	0	0	0	0	0	0	0	0	0	4.42E-01	<b>4.47E-01</b>
High-level radioactive waste, conditioned, to final repository	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>0</b>
Intermediate- and low-level radioactive waste, conditioned, to final repository	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>0</b>
Components for re-use	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>0</b>
Materials for recycling	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>0</b>
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>0</b>
Exported energy	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>0</b>

## Carbon emissions and removals

Biogenic Carbon Removal from Product	kg CO <sub>2</sub>	1.06E-01	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>1.06E-01</b>
Biogenic Carbon Emission from Product	kg CO <sub>2</sub>	4.33E-02	0	0	0	0	0	0	0	0	0	0	0	0	9.36E-02	<b>1.37E-01</b>
Biogenic Carbon Removal from Packaging	kg CO <sub>2</sub>	1.27E-04	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>1.27E-04</b>
Biogenic Carbon Emission from Packaging	kg CO <sub>2</sub>	0	0	1.13E-05	0	0	0	0	0	0	0	0	0	0	0	<b>1.13E-05</b>
Biogenic Carbon Emission from Combustion of Waste from Renewable Sources Used in Production Processes	kg CO <sub>2</sub>	0	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>0</b>
Calcination Carbon Emissions	kg CO <sub>2</sub>	0	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>0</b>
Carbonation Carbon Removals	kg CO <sub>2</sub>	0	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>0</b>
Carbon Emissions from Combustion of Waste from Non-Renewable Sources used in Production Processes	kg CO <sub>2</sub>	0	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>0</b>

## TRACI v2.1 disaggregated results for kraft-faced EcoBatt® Insulation per functional unit

LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks. These six impact categories required by the PCR are globally deemed mature enough to be included in Type III environmental declarations. Other categories are being developed and defined and LCA should continue making advances in their development; however, the EPD users shall not use additional measures for comparative purposes. Impact categories which were not required by the PCR are included in part to allow for the calculation of millipoints using the SM2013 Methodology, but it should be noted that there are known limitations related to these impact categories due to their high degree of uncertainty. LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
Acidification	kg SO <sub>2</sub> eq	3.32E-03	1.41E-04	3.86E-06	0	0	0	0	0	0	0	0	6.16E-05	0	1.81E-04
Eutrophication	kg N eq	3.10E-04	8.77E-06	8.72E-07	0	0	0	0	0	0	0	0	6.85E-06	0	1.22E-05
Global warming	kg SO <sub>2</sub> eq	6.97E-01	1.03E-01	5.70E-04	0	0	0	0	0	0	0	0	1.92E-02	0	5.24E-02
Ozone depletion	kg CFC-11 eq	2.08E-10	3.55E-12	3.60E-11	0	0	0	0	0	0	0	0	3.33E-13	0	2.06E-12
Smog	kg O <sub>3</sub> eq	2.89E-02	2.42E-03	2.63E-05	0	0	0	0	0	0	0	0	6.73E-04	0	1.18E-03
Fossil fuel depletion	MJ, LHV	1.09E+00	2.07E-01	3.36E-04	0	0	0	0	0	0	0	0	1.05E-02	0	3.03E-02

## Additional environmental information for kraft-faced EcoBatt® Insulation per functional unit

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
Ecotoxicity	CTUe	2.52E-04	5.47E-05	1.36E-07	0	0	0	0	0	0	0	0	3.40E-06	0	6.54E-06
Carcinogenics	CTUh	7.54E-11	1.81E-13	1.53E-13	0	0	0	0	0	0	0	0	2.59E-13	0	5.82E-12
Non-carcinogenics	CTUh	2.10E-12	6.59E-14	1.67E-13	0	0	0	0	0	0	0	0	9.80E-14	0	3.38E-12
Respiratory effects	kg PM2.5 eq	9.62E-04	8.57E-06	4.57E-07	0	0	0	0	0	0	0	0	1.68E-06	0	6.69E-05

The product does not contain substances that are identified as hazardous according to standards or regulations of the Resource Conservation and Recovery Act (RCRA), Subtitle C, nor does it (or its associated processes) release dangerous, regulated substances that affect health and environment, including indoor air emissions, gamma or ionizing radiation emissions, or chemicals released to the air or leached to water and soil.

## SM Transparency Report™ + Material Health Overview™

<b>VERIFICATION</b>	LCA
<b>3rd party reviewed</b>	
Transparency Report	
<b>3rd party verified</b>	
Material evaluation	
<b>Self-declared</b>	

This declaration was independently verified by NSF to ISO 21930:2017, EN 15804, the UL Environment PCR, and ISO 14025:2006.

NSF International  
789 N. Dixboro Road  
Ann Arbor, MI 48105, USA  
www.nsf.org  
734 769 8010

**Knauf Insulation, Inc.**  
One Knauf Drive  
Shelbyville, IN 46176  
www.knaufinsulation.us  
317 398 4434

Contact us

Validity: 12/03/18 – 12/03/23  
KNA – 12032018 – 002

